


**Maintenance products**

Rolling bearings

Plain bearings

# Hydraulic Pumps for mounting and dismounting

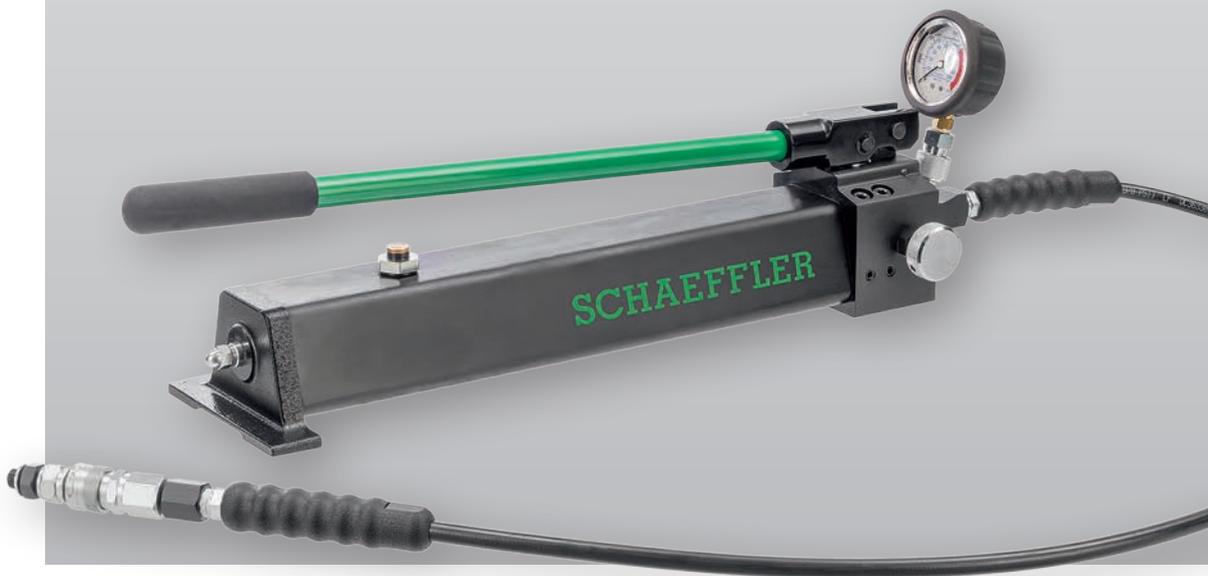

**SCHAEFFLER**

## Hydraulic pumps for mounting and dismounting

### Product characteristics

- Work can be done comfortably with minimal force expenditure
- Risk of damage to rolling bearings is reduced
- Allows precise positioning of rolling bearings
- Oil can easily be refilled
- A wide range of accessories is available
- New design

### Applications

- Mounting and dismounting of rolling bearings with tapered bores
- Mounting and dismounting of components such as couplings, gears, gearboxes, and ships' propellers



### Available types



	PUMP700-2L	PUMP1000-2,2L	PUMP1000-5L-AIR	PUMP4000-1,6L
Max. oil pressure (bar)	700	1,000	1,000	4,000
Max. interference fit (N/mm <sup>2</sup> )	35	50	50	200
Oil tank (l)	2	2.2	5	1.6
Application	For mounting with hydraulic nuts			For mounting in high-pressure applications
Advantages	Good price-performance ratio for occasional use	Ideally suited to different applications and continuous use	Comfort version for hands-free use	Special easy-to-use pump

Detailed information can be found in the TPI 195 technical product information

**Schaeffler Technologies AG & Co. KG**

Georg-Schaefer-Straße 30

97421 Schweinfurt

Germany

Phone +49 9721 91-0

E-mail [info.de@schaeffler.com](mailto:info.de@schaeffler.com)

Every care has been taken to ensure the correctness of the information contained in this publication but no liability can be accepted for any errors or omissions. We reserve the right to make technical changes.

© Schaeffler Technologies AG & Co. KG  
Issued: 2019, January

This publication or parts thereof may not be reproduced without our permission.